


70x150mm

KWS-2302C Návod k použití

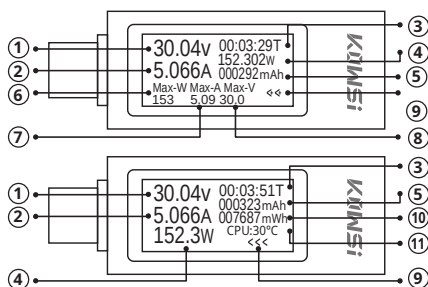

Parametry produktu

- | | |
|--|-----------------|
| 1: Napětí 4-30V | 2: Proud 0-12A |
| 3: Časovač 0-99 hodin | 4: Výkon 0-360W |
| 5: Kapacita 0-99999mAh | |
| 6: Záznam maximální zaznamenaný výkon. | |
| 7: Záznam maximální naměřený proud. | |
| 8: Záznam maximální naměřené napětí v jednom bodě. | |
| 9: Indikátor směru proudu. | |
| 10: Elektřina 0-99999Wh | |
| 11: Teplota CPU | |

Přepínání funkcí

Na zadní straně produktu se nachází tlačítko, na které lze kliknout pro změnu zobrazené stránky. Dvojklik na tlačítko vyvolá změnu na zaznamenaný čas, kapacitu a výkon.

Často kladené otázky

Otázka 1: Proč je produkt připojený, ale nezobrazuje se?

Odpověď: Většina nabíjecích produktů s porty typu C nemá na výstupu ve výchozím nastavení napětí, to se aktivuje pouze v okamžiku detekování protokolu.


Otázka 2: Nabíječka mého produktu je označena 10 A nebo 120 W. Proč testovací tabulka nedokáže detekovat 10 A nebo 120 W?

Odpověď: Hodnota testovaná tímto produktem je parametr nabíjení v reálném čase a hodnota označená na nabíječce je parametr maximálního výkonu produktu.

Otázka 3: Bude mít produkt proud 0,01-0,02 A? bez připojení k zátěži během používání?

Odpověď: Tento produkt využívá obousměrnou detekci proudu. Je to normální mít malý proud, ale lze jej také odstranit stisknutím tlačítka. Metoda eliminace: Ujistěte se, že není připojeno žádné zatížení. Stiskněte a držte tlačítko a poté připojte typ C k 5V. Uvolněte tlačítko, když se na displeji objeví nápis CAL a stroj automaticky eliminuje proud v klidu.

KWS-2302C Product Manual

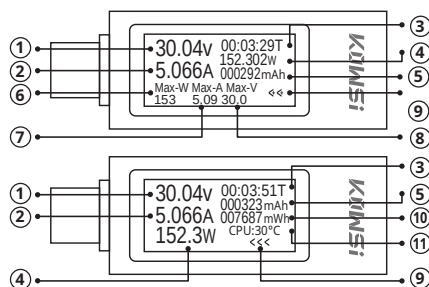

Product parameters

- | | |
|--|------------------|
| 1: Voltage 4-30V | 2: Current 0-12A |
| 3: Timing 0-99 hours | 4: Power 0-360W |
| 5: Capacity 0-99999mAh | |
| 6: Record the maximum power recorded. | |
| 7: Record a maximum current measurement. | |
| 8: Record a maximum voltage at a single point. | |
| 9: Current Direction Indicator. | |
| 10: Electricity 0-99999Wh | |
| 11: CPU temperature | |

Functional operation

There is a button on the back of the product that can be clicked to change the display page. Double-click the button to change the display direction. Press and hold for about 3 seconds to clear the recorded timing, capacity, and power.

Frequently Asked Questions

Question 1: Why is the product plugged in and not displayed?

Answer: Most charging products with type-c ports have no voltage output by default and only become active when the load protocol is detected.

Question 2: My product charger is marked with 10A or 120W. Why can't the test table detect 10A or 120W?

Answer: The value tested by this product is the real-time charging parameter during the charging process, and the marked on the charger is the maximum power parameter of the product.

Question 3: Will the product have a current of 0.01-0.02A without connecting to the load during use?

Answer: This product utilizes two-way current detection. It is normal to have a small current, but it can also be eliminated by pressing the button. Elimination method: Ensure that when no load is connected, press and hold the button and then connect type-c to 5V to the female seat. Release the button when the display screen comes out of CAL, and the machine will automatically eliminate the idle current.